





Performance



Accessibility



Best Practices



SEO



PWA



## Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)



▲ 0–49

50–89

90–100

### METRICS

[Expand view](#)

First Contentful Paint

0.4 s

Largest Contentful Paint

0.5 s

Total Blocking Time

0 ms

Cumulative Layout Shift

0


Speed Index

0.7 s



[View Treemap](#)

[View Original Trace](#)

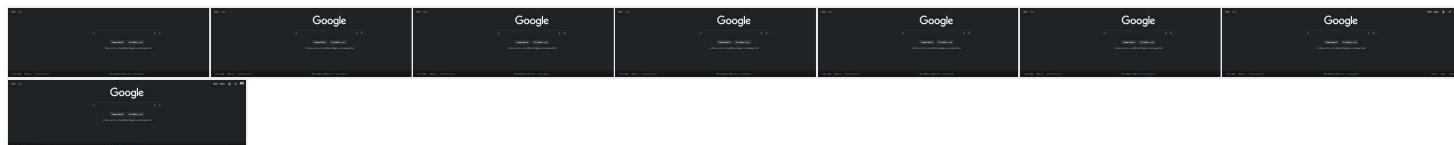

Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)

### OPPORTUNITIES

Opportunity

Estimated Savings

## Reduce unused JavaScript

0.48s ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity.

[Learn how to reduce unused JavaScript.](#) LCP

Show 3rd-party resources (1)


URL	Transfer Size	Potential Savings
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	<b>798.3 KiB</b>	<b>566.1 KiB</b>
...ee=AfeaP:TkrAjf;BMxAGc:E5bFse;BgS6mb:fidj5d;BjwMce:cXX2Wb;CxXA... (www.google.com)	475.6 KiB	400.0 KiB
...ee=cEt90b:ws9Tlc;qddgKe:x4FYXe,d7YSfd;yxTchf:KUM7Z;dtl0hd:ILQW... (www.google.com)	282.1 KiB	140.7 KiB
...rs=AHpOoo9JB.../cb=gapi.loaded_0 (apis.google.com)	40.6 KiB	25.4 KiB
Google CDN <span>Cdn</span>	<b>76.5 KiB</b>	<b>47.9 KiB</b>
...ed=1/rs=AA2YrTuT0... (www.gstatic.com)	76.5 KiB	47.9 KiB

These suggestions can help your page load faster. They don't [directly affect](#) the Performance score.

## DIAGNOSTICS

### ▲ Image elements do not have explicit `width` and `height`

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS

URL	
 img.Pb9hCb	data:image/png;base64,iVBORw0KGgoAAAANSUheUgAAABUAAAAYCAMAAAAi V...

### ▲ Does not have a `<meta name="viewport">` tag with `width` or `initial-scale` No `<meta name="viewport">` tag found

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay](#)

▲ Page prevented back/forward cache restoration — 1 failure reason ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

Failure reason	Failure type
Pages that use Media Device Dispatcher are not eligible for back/forward cache.  https://www.google.com	Pending browser support

○ Avoid chaining critical requests — 1 chain found ^

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#) FCP LCP

Maximum critical path latency: **394.866 ms**

*Initial Navigation*

https://www.google.com

...ct=zgms/rs=AA2YrTvqy... (www.gstatic.com) - **40.028 ms, 1.16 KiB**

○ User Timing marks and measures — 10 user timings ^

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

Name	Type	Start Time	Duration
fcbyXe	Measure	453.70 ms	18.11 ms
kDcP9b	Measure	455.84 ms	15.36 ms
fcbyXe	Measure	494.32 ms	0.38 ms
fcbyXe	Measure	824.13 ms	0.37 ms
SearchAFTStart	Mark	263.00 ms	
trigger:SearchAFTEnd	Mark	401.00 ms	
triggerRender_0	Mark	453.70 ms	

Name	Type	Start Time	Duration
O7jPNb	Mark		455.84 ms
triggerRender_1	Mark		494.32 ms
triggerRender_2	Mark		824.13 ms

Keep request counts low and transfer sizes small — 31 requests • 1,104 KiB

To set budgets for the quantity and size of page resources, add a budget.json file. [Learn more about performance budgets.](#)


Resource Type	Requests	Transfer Size
Total	31.0	1,104.3 KiB
Script	8.0	901.6 KiB
Other	13.0	132.3 KiB
Document	2.0	58.8 KiB
Image	7.0	10.5 KiB
Stylesheet	1.0	1.2 KiB
Media	0.0	0.0 KiB
Font	0.0	0.0 KiB
Third-party	5.0	104.1 KiB

Largest Contentful Paint element — 510 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#)

LCP

Element



img.InXdpd

Phase	% of LCP	Timing
TTFB	52%	260 ms
Load Delay	34%	170 ms
Load Time	12%	60 ms
Render Delay	2%	10 ms

○ Avoid long main-thread tasks — 1 long task found ^

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT

URL	Start Time	Duration
Selenium IDE <span>Chrome Extension</span>		<b>52 ms</b>
chrome-extension://mooikfkahbdckldjjndioackbalphokd/assets/vendor/global.js	440 ms	52 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (31)


Hide

Eliminate render-blocking resources ^

Resources are blocking the first point of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) FCP LCP

Properly size images — Potential savings of 4 KiB ^

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#)

URL	Resource Size	Potential Savings
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	<b>5.0 KiB</b>	<b>4.4 KiB</b>
 <span>img</span> ...hpp/bard-icon-static-48px.png (www.google.com)	5.0 KiB	4.4 KiB

URL	Resource Size	Potential Savings
-----	---------------	-------------------

### Defer offscreen images ^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#)

### Minify CSS ^

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP

### Minify JavaScript — Potential savings of 99 KiB ^

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) FCP LCP

Show 3rd-party resources (1)

URL	Transfer Size	Potential Savings
Unattributable	122.5 KiB	95.8 KiB
chrome-extension://gighmmpiobklfepjocnamgkbbiglidom/vendor/@eyeo/webext-sdk/content.js	101.7 KiB	83.8 KiB
chrome-extension://gighmmpiobklfepjocnamgkbbiglidom/polyfill.js	14.0 KiB	8.9 KiB
chrome-extension://gighmmpiobklfepjocnamgkbbiglidom/adblock-functions.js	6.8 KiB	3.1 KiB
Selenium IDE <span>Chrome Extension</span>	7.1 KiB	2.8 KiB
chrome-extension://mooikfkahbdckldjjndioackbalphokd/assets/prompt.js	7.1 KiB	2.8 KiB

### Reduce unused CSS — Potential savings of 12 KiB ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP

URL	Transfer Size	Potential Savings
h1,ol,ul,li,button{margin:0;padding:0} ...	13.2 KiB	12.3 KiB

### Efficiently encode images

Optimized images load faster and consume less cellular data. [Learn how to efficiently encode images.](#)

### Serve images in next-gen formats

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats.](#)

### Enable text compression

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) FCP LCP

### Preconnect to required origins

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) FCP LCP

### Initial server response time was short — Root document took 190 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) FCP LCP

URL	Time Spent
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	190 ms
https://www.google.com	190 ms

### Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) FCP LCP

### Preload key requests

Consider using `<link rel=preload>` to prioritize fetching resources that are currently requested later in page load. [Learn how to preload key requests.](#) FCP LCP

### Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#)

### Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats](#) LCP

### Remove duplicate modules in JavaScript bundles ^

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. TBT

### Avoid serving legacy JavaScript to modern browsers — Potential savings of 10 KiB ^

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) TBT

URL	Potential Savings
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	9.8 KiB
...rs=AHpOoo9JB.../cb=gapi.loaded_0 (apis.google.com)	9.8 KiB
... rs=AHpOoo9JB.../cb=gapi.loaded_0:121:15 (apis.google.com )	Date.prototype.toISOStri ng

### Preload Largest Contentful Paint image ^

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) LCP

### Avoids enormous network payloads — Total size was 1,106 KiB ^

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#) LCP

Show 3rd-party resources (3)

URL	Transfer Size
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	985.7 KiB
...ee=AfeaP:TkrAjf;BMxAGc:E5bFse;BgS6mb:fidj5d;BjwMce:cXX2Wb;CxXA... (www.google.com)	475.6 KiB
...ee=cEt90b:ws9Tlc;qddgKe:x4FYXe,d7YSfd;yxTchf:KUM7Z;dtl0hd:ILQW... (www.google.com)	282.1 KiB



URL	Transfer Size
...am=CAAAAAAAAA.../rs=ACT90oEmWgX46CRMI (www.google.com)	109.9 KiB
https://www.google.com	56.9 KiB
...rs=AHpOoo9JB.../cb=gapi.loaded_0 (apis.google.com)	40.6 KiB
...bg/N29B_8HU1...js (www.google.com)	14.4 KiB
...rs=ACT90oFRK.../m=syo4,syuc,syud,syue,syuf,syug,DPreE,sy7b,WINQG... (www.google.com)	6.2 KiB
Google CDN <span>Cdn</span>	<b>82.0 KiB</b>
...ed=1/rs=AA2YrTuT0... (www.gstatic.com)	76.5 KiB
...rs=AOaEmIGH7.../m=hfcr (www.gstatic.com)	5.5 KiB
google.com	<b>21.0 KiB</b>
...gog/get?rt=j&sourceid=538 (aa.google.com)	21.0 KiB

Uses efficient cache policy on static assets — 1 resource found ^

A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

URL	Cache TTL	Transfer Size
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>		<b>1 KiB</b>
/ogw/AKPQZvy0j...=s32-c-mo (lh3.googleusercontent.com)	1d	1 KiB

Avoids an excessive DOM size — 321 elements ^

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) TBT

Statistic	Element	Value
Total DOM Elements		321
Maximum DOM Depth	rect	18

Statistic	Element	Value
Maximum Child Elements	 body	12

JavaScript execution time — 0.4 s ^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

Show 3rd-party resources (2)

URL	Total CPU Time	Script Evaluation	Script Parse
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	250 ms	148 ms	26 ms
https://www.google.com	105 ms	41 ms	12 ms
... ee=cEt90b:ws9Tlc;qddgKe:x4FYXe,d7YSfd;yxTchf:KUM7Z;dtl0hd:ILQ W... (www.google.com)	88 ms	70 ms	8 ms
... ee=AfeaP:TkrAjf;BMxAGc:E5bFse;BgS6mb:fidj5d;BjwMce:cXX2Wb;C xXA... (www.google.com)	57 ms	37 ms	7 ms
Unattributable	182 ms	83 ms	0 ms
_lighthouse-eval.js	100 ms	62 ms	0 ms
Unattributable	82 ms	21 ms	0 ms
Google CDN <span>Cdn</span>	55 ms	39 ms	8 ms
...ed=1/rs=AA2YrTuT0... (www.gstatic.com)	55 ms	39 ms	8 ms
Selenium IDE <span>Chrome Extension</span>	51 ms	47 ms	4 ms
chrome- extension://mooikfkahbdckldjjndioackba1phokd/assets/playback.js	51 ms	47 ms	4 ms

Minimizes main-thread work — 0.6 s ^

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

Category	Time Spent
Script Evaluation	361 ms
Other	108 ms
Script Parsing & Compilation	73 ms
Style & Layout	49 ms
Garbage Collection	15 ms
Parse HTML & CSS	11 ms
Rendering	4 ms

All text remains visible during webfont loads ^

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display](#). FCP LCP

Minimize third-party usage — Third-party code blocked the main thread for 0 ms ^

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact](#). TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Google CDN <span>Cdn</span>	<b>83 KiB</b>	<b>0 ms</b>
...ed=1/rs=AA2YrTuT0... (www.gstatic.com)	76 KiB	0 ms
...rs=AOaEmlGH7.../m=hfcr (www.gstatic.com)	6 KiB	0 ms
Selenium IDE <span>Chrome Extension</span>	<b>21 KiB</b>	<b>0 ms</b>
chrome-extension://mooikfkahbdckldjjndioackbalphokd/assets/prompt.js	21 KiB	0 ms
google.com	<b>21 KiB</b>	<b>0 ms</b>
...gog/get?rt=j&sourceid=538 (aa.google.com)	21 KiB	0 ms

Third-Party	Transfer Size	Main-Thread Blocking Time
Google/DoubleClick Ads <span>Ad</span>	0 KiB	0 ms


Lazy load third-party resources with facades ^

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) TBT

Largest Contentful Paint image was not lazily loaded ^

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) LCP

Element



img.InXdpd

Avoid large layout shifts ^

These DOM elements contribute most to the CLS of the page. [Learn how to improve CLS](#) CLS

Uses passive listeners to improve scrolling performance ^

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners.](#)

Avoids `document.write()` ^

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid document.write\(\).](#)

Avoid non-composited animations ^

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

# Accessibility



These checks highlight opportunities to [improve the accessibility of your web app](#). Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

## ARIA

▲ [aria-\*] attributes do not have valid values ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes](#).

Failing Elements

	textarea#APjFqb.gLFyf
	div.ayzqOc.pHiOh


These are opportunities to improve the usage of ARIA in your application which may enhance the experience for users of assistive technology, like a screen reader.

## NAMES AND LABELS

▲ Image elements do not have [alt] attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute](#).

Failing Elements

	img
---	-----

## Failing Elements


These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

### NAVIGATION

- The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#)

## Failing Elements



html

These are opportunities to improve keyboard navigation in your application.

### ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- The page has a logical tab order ^

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

- Interactive controls are keyboard focusable ^

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

- Interactive elements indicate their purpose and state ^

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

- The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

- User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

Custom controls have ARIA roles ^

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#)

Visual order on the page follows DOM order ^

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#)

HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review.](#)

PASSED AUDITS (18)

Hide

`[aria-*]` attributes match their roles ^

Each ARIA role supports a specific subset of aria-\* attributes. Mismatching these invalidates the aria-\* attributes. [Learn how to match ARIA attributes to their roles.](#)

`[aria-hidden="true"]` is not present on the document `<body>` ^

Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document `<body>`. [Learn how aria-hidden affects the document body.](#)

`[role]`s have all required `[aria-*]` attributes ^

Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

[role] values are valid ^

ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

[aria-\*] attributes are valid and not misspelled ^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#)

Input buttons have discernible text. ^

Adding discernible and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#)

Form elements have associated labels ^

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

button, link, and menuitem elements have accessible names ^

When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#)

[aria-hidden="true"] elements do not contain focusable descendents ^

Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

Background and foreground colors have a sufficient contrast ratio ^

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Document has a <title> element ^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)



[id] attributes on active, focusable elements are unique



All focusable elements must have a unique id to ensure that they're visible to assistive technologies. [Learn how to fix duplicate ids.](#)

<html> element has a [lang] attribute



If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

<html> element has a valid value for its [lang] attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the lang attribute.](#)

Links are distinguishable without relying on color.



Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

Links have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

No element has a [tabindex] value greater than 0



A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

NOT APPLICABLE (34)

Hide

[accesskey] values are unique



Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. [Learn more about access keys.](#)

Elements with role="dialog" or role="alertdialog" have accessible names.



ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. [Learn how to make ARIA dialog elements more accessible.](#)

ARIA input fields have accessible names



When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels.](#)

ARIA `meter` elements have accessible names ^

When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements.](#)

ARIA `progressbar` elements have accessible names ^

When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements.](#)

Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children. ^

Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements.](#)

`[role]`s are contained by their required parent element ^

Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element.](#)

Elements with the `role=text` attribute do not have focusable descendents. ^

Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute.](#)

ARIA toggle fields have accessible names ^

When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields.](#)

ARIA `tooltip` elements have accessible names ^

When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements.](#)

ARIA `treeitem` elements have accessible names ^

When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling treeitem elements.](#)

Buttons have an accessible name ^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

- `<d1>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#)

- Definition list items are wrapped in `<d1>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<d1>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#)

- No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#)

- `<frame>` or `<iframe>` elements have a title ^

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#)

- Heading elements appear in a sequentially-descending order ^

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. [Learn more about heading order.](#)

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute. ^

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

- `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

- Lists contain only `<li>` elements and script supporting elements (`<script>` and `<template>`). ^

Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#)

- List items (`<li>`) are contained within `<ul>`, `<ol>` or `<menu>` parent elements ^

Screen readers require list items (`<li>`) to be contained within a parent `<ul>`, `<ol>` or `<menu>` to be announced properly. [Learn more about proper list structure.](#)

- The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#)

- `[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5. ^

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

- `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

- Select elements have associated label elements. ^

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

- Tables use `<caption>` instead of cells with the `[colspan]` attribute to indicate a caption. ^

Screen readers have features to make navigating tables easier. Ensuring that tables use the actual caption element instead of cells with the `[colspan]` attribute may improve the experience for screen reader users. [Learn more about captions.](#)

- `<td>` elements in a large `<table>` have one or more table headers. ^

Screen readers have features to make navigating tables easier. Ensuring that `<td>` elements in a large table (3 or more cells in width and height) have an associated table header may improve the experience for screen reader users. [Learn more about table headers.](#)

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)

[lang] attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)

<video> elements contain a <track> element with [kind="captions"] ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)

All heading elements contain content. ^


A heading with no content or inaccessible text prevent screen reader users from accessing information on the page's structure. [Learn more about headings.](#)

Identical links have the same purpose. ^

Links with the same destination should have the same description, to help users understand the link's purpose and decide whether to follow it. [Learn more about identical links.](#)

Touch targets have sufficient size and spacing. ^

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls activate the targets. [Learn more about touch targets.](#)



## Best Practices

### GENERAL

Issues were logged in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the [Issues](#) panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the [Issues](#) panel in Chrome DevTools for more details on each issue.

Issue type

Cookie

...ct=zgms/rs=AA2YrTvqy... (www.gstatic.com)

## Issue type

...ed=1/rs=AA2YrTuT0... (www.gstatic.com)

...rs=AOaEmIGH7.../m=hfcr (www.gstatic.com)

## Detected JavaScript libraries

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)

Name	Version
Boq	
Wiz	

## Missing source maps for large first-party JavaScript

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

Show 3rd-party resources (10)

URL	Map URL
Other Google APIs/SDKs <span>Utility</span> <span>1st Party</span>	
... ee=AfeaP:TkrAjf;BMxAGc:E5bFse;BgS6mb:fidj5d;BjwMce: cXX2Wb;CxXA... (www.google.com)	
Large JavaScript file is missing a source map	
... ee=cEt90b:ws9Tlc;qddgKe:x4FYXe,d7YSfd;yxTchf:KUM7Z ;dtl0hd:ILQW... (www.google.com)	
Large JavaScript file is missing a source map	
...bg/N29B_8HU1...js (www.google.com)	
Selenium IDE <span>Chrome Extension</span>	
chrome- extension://mooikfkahbdckldjjndioackbalphokd/assets/rec ord.js	chrome- extension://mooikfkahbdckldjjndioackbalphokd/assets /record.js.map
Error: Failed fetching source map (null)	

## URL

## Map URL

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/record.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/polyfills.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/polyfills.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/playback.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/playback.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/escape.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/escape.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/atoms.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/atoms.js

Error: Failed fetching source map (null)

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/record.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/polyfills.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/polyfills.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/playback.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/playback.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/escape.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/escape.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/atoms.js.map

chrome-  
extension://mooikfkahbdckldjjndioackbalphokd/assets/atoms.js.map

URL

Map URL

Unattributable

chrome-  
extension://gihmmpiobk1fepjocnamgkbiglidom/vendor/@eyeo  
/webext-sdk/content.js

chrome-  
extension://gihmmpiobk1fepjocnamgkbiglidom/vendor/@eyeo  
/webext-sdk/content.js

## TRUST AND SAFETY

### ○ Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

## PASSED AUDITS (11)

Hide

### Uses HTTPS ^

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS](#).

### Avoids requesting the geolocation permission on page load ^

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission](#).

### Avoids requesting the notification permission on page load ^

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications](#).

### Allows users to paste into input fields ^



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

Displays images with correct aspect ratio ^

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution ^

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Page has the HTML doctype ^

Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset ^

A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

Avoids `unload` event listeners ^

The `unload` event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use `pagehide` or `visibilitychange` events instead. [Learn more about unload event listeners](#)

Avoids deprecated APIs ^

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

No browser errors logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

NOT APPLICABLE (1)

Hide

Fonts with `font-display: optional` are preloaded ^

Preload optional fonts so first-time visitors may use them. [Learn more about preloading fonts](#)



# SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials](#).

## MOBILE FRIENDLY

▲ Does not have a `<meta name="viewport">` tag with `width` or `initial-scale` No `<meta name="viewport">` tag found ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#). TBT

Make sure your pages are mobile friendly so users don't have to pinch or zoom in order to read the content pages. [Learn how to make pages mobile-friendly](#).

## CONTENT BEST PRACTICES


▲ Document does not have a meta description ^

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description](#).

▲ Image elements do not have `[alt]` attributes ^

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute](#).

Failing Elements

	img
---	-----

Format your HTML in a way that enables crawlers to better understand your app's content.

## ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

○ Structured data is valid ^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

Document has a <title> element	^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <a href="#">Learn more about document titles.</a>	
Page has successful HTTP status code	^
Pages with unsuccessful HTTP status codes may not be indexed properly. <a href="#">Learn more about HTTP status codes.</a>	
Links have descriptive text	^
Descriptive link text helps search engines understand your content. <a href="#">Learn how to make links more accessible.</a>	
Links are crawlable	^
Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. <a href="#">Learn how to make links crawlable</a>	
Page isn't blocked from indexing	^
Search engines are unable to include your pages in search results if they don't have permission to crawl them. <a href="#">Learn more about crawler directives.</a>	
robots.txt is valid	^
If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. <a href="#">Learn more about robots.txt.</a>	
Document has a valid hreflang	^
hreflang links tell search engines what version of a page they should list in search results for a given language or region. <a href="#">Learn more about hreflang.</a>	
Document avoids plugins	^
Search engines can't index plugin content, and many devices restrict plugins or don't support them. <a href="#">Learn more about avoiding plugins.</a>	

- Document has a valid `rel=canonical` ^

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)
- Document uses legible font sizes ^

Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)
- Tap targets are sized appropriately ^

Interactive elements like buttons and links should be large enough (48x48px), or have enough space around them, to be easy enough to tap without overlapping onto other elements. [Learn more about tap targets.](#)



## PWA

These checks validate the aspects of a Progressive Web App. [Learn what makes a good Progressive Web App.](#)

### INSTALLABLE

- Web app manifest or service worker do not meet the installability requirements — 1 reason ^

Service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. With proper service worker and manifest implementations, browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. [Learn more about manifest installability requirements.](#)

Failure reason

Page has no manifest `<link>` URL

### PWA OPTIMIZED

- Does not register a service worker that controls page and `start_url` ^

The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. [Learn more about Service Workers.](#)

▲ Is not configured for a custom splash screen **Failures: No manifest was fetched.** ^

A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. [Learn more about splash screens.](#)

▲ Does not set a theme color for the address bar.  
**Failures: No manifest was fetched, No ``<meta name="theme-color">`` tag found.** ^

The browser address bar can be themed to match your site. [Learn more about theming the address bar.](#)

○ Content is sized correctly for the viewport ^

If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. [Learn how to size content for the viewport.](#)

▲ Does not have a `<meta name="viewport">` tag with `width` or `initial-scale` **No ``<meta name="viewport">`` tag found** ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#) (TBT)

▲ Manifest doesn't have a maskable icon **No manifest was fetched** ^

A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a device. [Learn about maskable manifest icons.](#)

#### ADDITIONAL ITEMS TO MANUALLY CHECK (3)

Hide

○ Site works cross-browser ^

To reach the most number of users, sites should work across every major browser. [Learn about cross-browser compatibility.](#)

○ Page transitions don't feel like they block on the network ^

Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception of performance. [Learn more about page transitions.](#)

○ Each page has a URL ^

Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. [Learn more about providing deep links.](#)

These checks are required by the baseline [PWA Checklist](#) but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

■ Captured at Sep 22, 2023, 5:26 PM CDT

■ Initial page load

■ Emulated Desktop with Lighthouse 10.4.0

■ Custom throttling

■ Single page load

■ Using Chromium 117.0.0.0 with devtools

Generated by **Lighthouse** 10.4.0 | [File an issue](#)